

Excellent Integrated System Limited


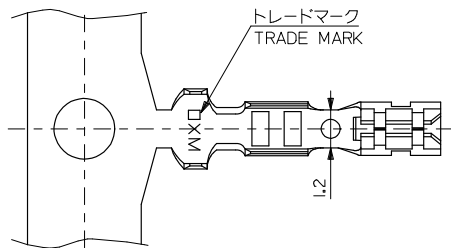


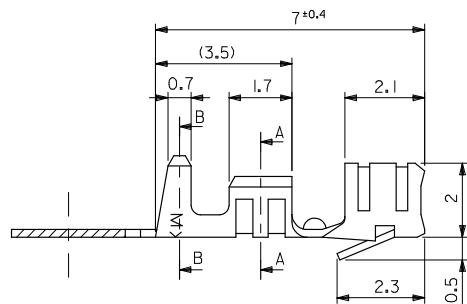
Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0008701039](#)


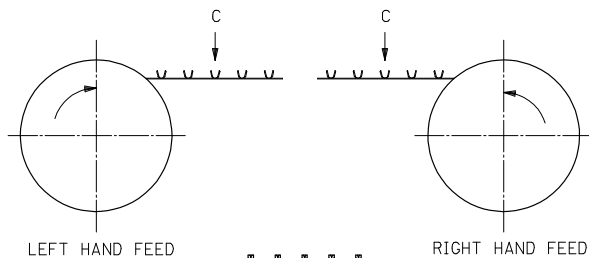
For any questions, you can email us directly:

sales@integrated-circuit.com

断面 A-A
SECT. A-A断面 B-B
SECT. B-B注 記
NOTE

- 材質: リン青銅 (t=0.203)
MATERIAL: PHOSPHOR BRONZE
- メッキ: 前鍍メッキ
FINISH: PRE TINNED
- 使用ハウジング: 5264シリーズ
SUITABLE HOUSING: 5264 SERIES
- 適用電線範囲: AWG#22-28 (0.33 ~ 0.08mm²)
WIRE RANGE: AWG #22-28(0.33 - 0.08mm²)
- 被覆外形: φ1.15 ~ φ1.9
INSULATION RANGE: φ 1.15 - φ1.9

RIGHT HAND	39-00-0159	5263PBTR	連鎖状 CHAIN
LEFT HAND	08-70-1040	5263PBTL	バラ状 LOOSE
	08-70-1039	5263PBT	連鎖状 CHAIN
FEED TYPE	EDP NO.	ENG. NO.	端子形状 FORM



VIEW C

REVISED EC NO: J2008-4450 T1: DRAWN: 2008/07/01 CH: KYOTOYODA 2008/07/02 APPR: NUKITA 2008/07/02	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1		DESIGN UNITS METRIC		 THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	DRAWN BY K. TOJO		DATE '91/07/19		TITLE 2.5 LOW PROFILE CRIMP RECEPTACLE			
		10 OVER 30 UNDER	± 0.25	CHECKED BY M. FUKUSHIMA		DATE '91/08/09					
		30 OVER	± 0.3	APPROVED BY M. ENOMOTO		DATE '91/08/09		 MOLEX INCORPORATED			
		ANGULAR	± 3 °	MATERIAL NO.		DOCUMENT NO.					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-5263-003		SHEET NO. 1 OF 1			
		SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									